





G3 Regular Grade System Process Chart

For Medium & High Solids Paint Systems

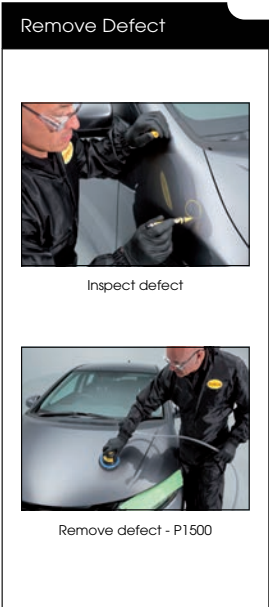

1. Compounding

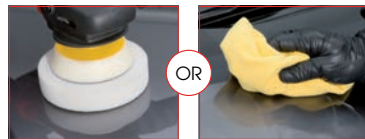

G3 Regular Grade

Paste Compound



Product Size

250g
400g
1kg
3kg

Codes

G3-250
G3-400
G3-1000
G3-3000

Applicators

G Mop 6" Wet Use Compounding Foam
G Mop 8" Wet Use Compounding Foam

Codes

GMC606
GMC806

BY MACHINE



Apply a small amount of product



Soak pad and attach to polisher



Spin off excess water



Compound at 1500 - 1800rpm



Keep lubricated when compounding



Wipe clean with a Finishing Cloth

BY HAND



Apply a small amount of product



Rub on with a moist Finishing Cloth



Wipe clean with a dry Finishing Cloth

2. Finishing



G3 Fine

Finishing Compound



Product Size

500g
1kg
1 US gallon

Codes

G3F501
G3F101
G3F118

Applicators

G Mop 3" Finishing Foam
G Mop 6" Finishing Foam
G Mop 8" Finishing Foam

Codes


GMF301
GMF601
GMF801




Attach a G Mop Finishing Foam to a polishing machine




Shake bottle well before use



Dispense a small quantity of product onto surface or pad



Spread and start compounding at 1000rpm




Slowly increase speed to 2000rpm. **DO NOT ALLOW PRODUCT TO DRY**



Wipe clean with a Finishing Cloth FC-3 (3 x cloths)

3. Protecting

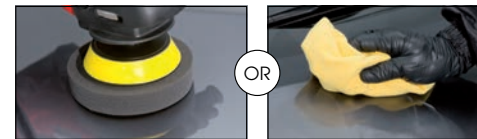

G3 Glaze

Gloss Enhancer



G3 Wax

Premium Liquid Protection



Product Size

500ml
1 ltr
1 US gallon

Codes

G3G501
G3G101
G3G118



Product Size

500ml
1 ltr
1 US gallon

Codes

G3W501
G3W106
G3W118


Applicators for both products

G Mop 3" Finishing Foam
G Mop 6" Finishing Foam
G Mop 8" Finishing Foam
Finishing Cloth (3 x cloths)


Codes

GMF301
GMF601
GMF801
FC-3

G3 Glaze - Primary Application by machine



Attach a G Mop Finishing Foam to a machine



Shake bottle well and apply a small quantity to pad or surface



Compound at 1000 - 1500rpm



Wipe clean with a Finishing Cloth FC-3 (3 x cloths)

G3 Wax - Primary Application by hand



Shake bottle well and apply a small quantity to the surface



Rub the product in a circular motion onto the surface with a cloth



Allow to dry to a haze



Wipe clean with a Finishing Cloth FC-3 (3 x cloths)



G3 Regular Grade Paste TECHNICAL BENEFITS

FOR MEDIUM AND HIGH SOLIDS PAINT SYSTEMS

- Permanent finish, contains no fillers so scratch marks will not reappear
- Recommended for use on OEM and refinish paint systems
- High gloss system
- Silicone free



WYATT MACHINE TOOLS

New Zealand's Leading Collision Repair Experts

www.wyatt.co.nz

388 Church St, Penrose, Auckland

info@wyatt.co.nz

Ph: 09 525 1000