




UNI COLOR ACRYLIC AEROSOL

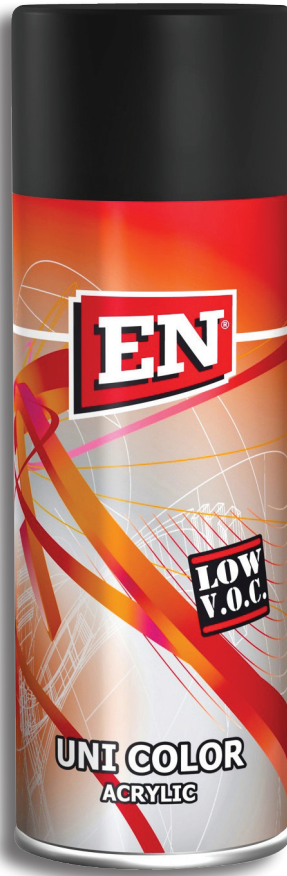

Product Description:

- VOC compliant.
- 1K Thermoplastic Acrylic Paint.
- Suitable for metallic and wooden surfaces, also for treating small surfaces on car bodies.

Technical Description:

- Easy to apply.
- High coverage.
- Fast drying.

AEROSOL EN UNI COLOR ACRYLIC

Pretreatment:



Clean substrate using a soft cloth and EN 7400 ANTI-SILIKON DEGREASER

Make sure the surface is air dried rather than wiped dry.



Use protective equipment.

Surface:

- Metallic surfaces.
- Wooden surfaces.
- EN Primed surfaces.

Product Application:



Shake well before using



Dust free:
10-12 mins / 18-23 °C



2-3 coats = 20-30 microns
Distance = 25cm



Full hardness within
24 hours.

AEROSOL EN UNI COLOR ACRYLIC

Flash Point:

-97°C / 143°F

Specific Gravity:

- g/ cm³

Solid Content (No thinner):

11-22 % Weight

VOC (2004/42/EC)

2004/42/IIIB(e)(840)740

The EU limit value for this product category in ready for use form is max 840 g/l of VOC. The VOC value of this product in ready for use form is max. 740 g/l.

Theoretical Coverage:

-

Cleaning of equipment:

-

Remarks:

- Always use the product in accordance with the specifications provided.
- Shake well before use.
- Prepare the area to be painted, ensure to be free from dirt, wax, oil etc.
- Keep a distance of 25 cm when spraying and leave internals 10min for better results. Leave for 24 hours to harden.
- Operating temperature 10-25°C
- Store in a cool place and use within 12 months for best results.

For professional use only. The information provided on this sheet has been carefully selected through a series of laboratory researches. It is based upon our best knowledge at the time of issue. This data is only for information purposes. We are not liable for its correctness, accuracy and completeness. It is up to the user to check for updates or further information if needed for his purpose. The intellectual property of the product, trademarks and copyrights is protected. All rights reserved. The relevant Material Safety Data Sheet and warnings displayed on the label must be read carefully. We may modify and / or discontinue operation of all or portions of this information at any time in our sole discretion, without any notice and assume no responsibility to update the information. All rules set forth in this clause shall apply accordingly for any future changes and amendments.

Version 1, Dec 2011.